

LED FLOODLIGHTS

SKYWALKER V4

SKV4-11000

General Features




| | |
|---------------------------------|----------------------------------|
| Power Consumption | 1000 Watt |
| Luminous Flux | ≤160.000 lm |
| Glow Color | Neutral White / White / Daylight |
| CCT | 3000 - 6500 K |
| CRI | +70,+80,+90 |
| Light Distrubution (Beam Angle) | 30°,60°, 90° & 135° |
| IP Marking | IP66 |
| IK Marking | IK08 |
| Warranty | 3 Years |

Electrical Specifications

| | |
|----------------|--------------------------|
| Input Voltage | 220-240 VAC |
| Frequency | 50 ~ 60 Hz |
| Power Factor | > 0,95 |
| Light Source | Power LED, Mid-Power LED |
| LED Chip | Cree / Nichia / Lumileds |
| LED Test | IESNA LM-80 & TM-21 |
| LED's Current | 250 mA - 700 mA |
| Operating Mode | Constant Current |
| Life Time | 50.000 Hours |

Mechanical Specifications

| | |
|---|------------------------------|
| Operating Temperature | (-35°C) -- (+60°C) |
| Housing Material | Die Cast Al. Extrusion |
| Dimensions (L*W*H) (Except connection apparatus) | 772 x 521 x 100 mm |
| Housing Coating | Electrostatic Powder Coating |
| LED's Lenses | PMMA |
| Net Weight (Except connection apparatus) | 15,0 kg |

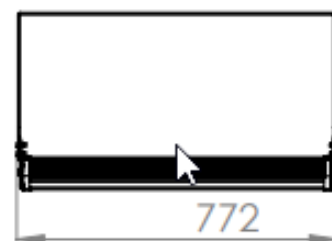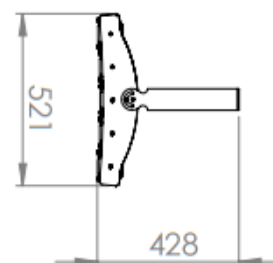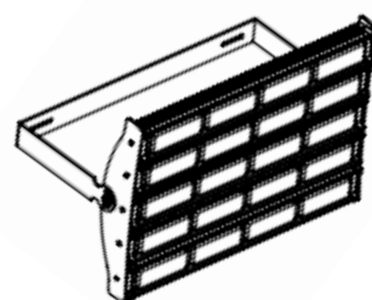

* The lumen values given in the table are approximate values.

